


## Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE/KF-100 Series  
Double Slotted Stainless Steel Grating  
with TwistLock Fastening System (Load Rating C250)  
ADA Compliant



## Grating Dimensions

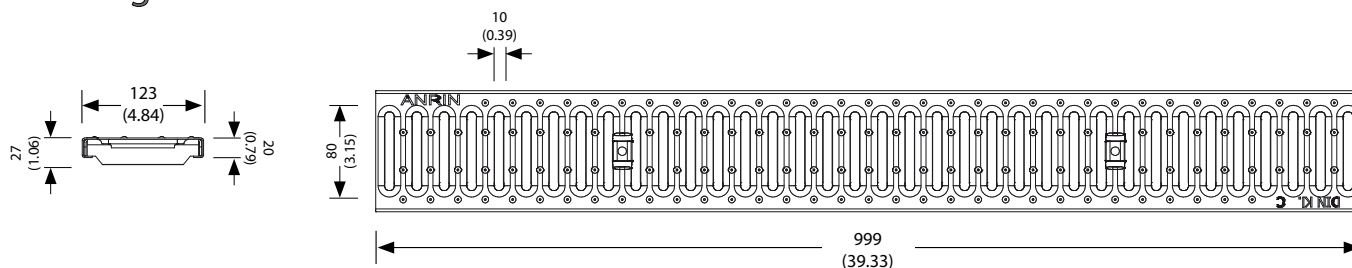

## Double Slotted Stainless Steel Grating

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm <sup>2</sup> /m (in <sup>2</sup> /ft)	Weight kg (lbs.)
<b>Load class C250</b>					
Double slotted stainless steel grating slot width = 10 mm (0.39 in)	01004640	1000 (39.37)	123 (4.84)	280 (13.23)	5.0 (11.02)
	01004660	500 (19.69)	123 (4.84)	280 (13.23)	2.5 (5.51)

## TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).