

Technical Data Sheet


ANRIN DRAIN Cover Gratings for KE/KF-100

Mesh Grating, Stainless Steel

with TwistLock Fastening (Load Class D400)



Grating Dimensions

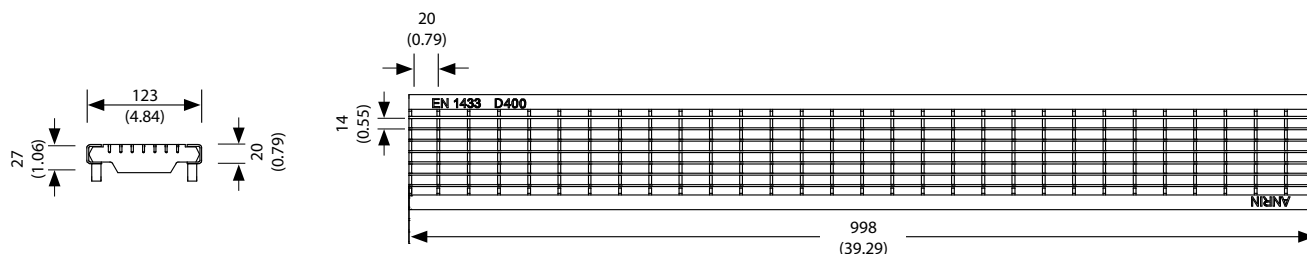

Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm ² /m (in ² /ft)	Weight kg (lbs.)
Mesh grating, stainless steel	01004940	1000 (39.37)	123 (4.84)	720 (34.01)	4.2 (9.24)
MW 20 x 14 mm (D400)	01004960	500 (19.69)	123 (4.84)	720 (34.01)	2.7 (5.94)

* Exception: Cross-road drainage of busy roads

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).