


Technical Data Sheet

ANRIN DRAIN Cover Grating for KE/KF-100 Series

Slotted Ductile Iron Grating with OvalGrip Design (Load Class E600)



Grating Dimensions

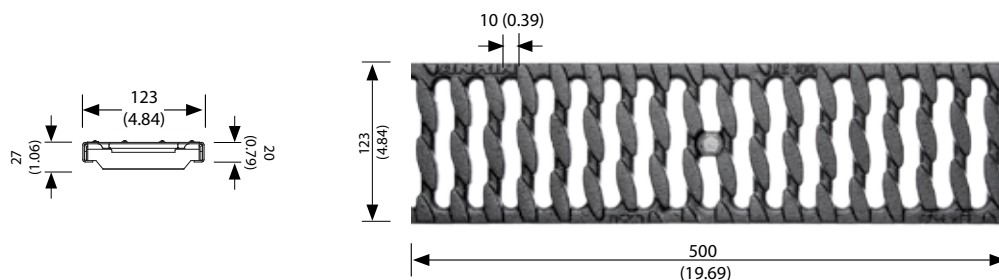

Grating Specifications

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm ² /m (in ² /ft)	Weight kg (lbs.)
Slotted Ductile Iron Grating with OvalGrip Design (E600*)	01005120	500 (19.69)	123 (4.84)	420 (22.68)	5.0 (11.02)

*Exception: Cross-road drainage of busy roads

TwistLock Fastening



The TwistLock fastening system is used for grating types of channels with a nominal width of 100 mm (3.93 in).