


Technical Data Sheet

ANRIN DRAIN Cover Grating for KF-100 Series
Slotted Ductile Iron Grating with OvalGrip Design (Load Class F900)



Grating Dimensions

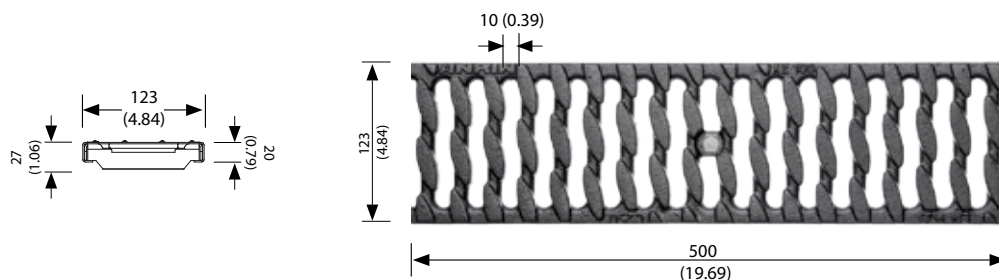

Grating Specifications

Designation	Article	Length mm (in)	Width mm (in)	Intake Area cm ² /m (in ² /ft)	Weight kg (lbs.)
Slotted Ductile Iron Grating with OvalGrip Design (F900) and RapidLock fastening	01006120	500 (19.69)	123 (4.84)	420 (22.68)	5.0 (11.02)

RapidLock Fastening



Advantages

- Easy to install and lock into channel
- Self-locking Rapidlock secures the grating safely into channel for traffic
- Better accommodation of traffic loads with intermeshing of grating and channel body
- Reliable and effective even when heavily soiled
- Locks into channel and lifts out without special tools