

Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-150 Series Slotted Grating, Ductile-Iron, OvalGrip Design with SnapLock Fastening (Load Class E600)



Grating Dimensions



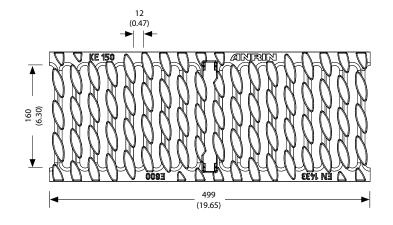

Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm²/m (in²/ft)	Weight kg (lbs.)
Slotted grating with OvalGrip Design Ductile-Iron, SW=12mm (E600*)	01115120	500 (19.69)	200 (7.87)	760 (35.90)	9.3 (20.50)

^{*}Exception: Cross-road drainage of busy roads

SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).

Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130 www.northstarindustries.ca