


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-150 Series
Longitudinal-Bar Grating, Ductile-Iron
with SnapLock Fastening (Load Class D400)



Grating Dimensions

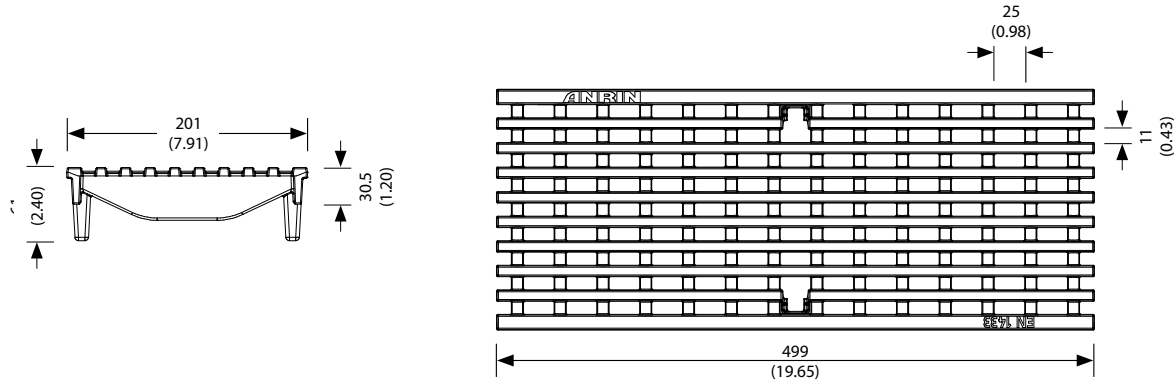

Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm ² /m (in ² /ft)	Weight kg (lbs.)
Longitudinal-bar grating Ductile-iron, MW 25 x 11 mm (D400*)	01115620	500 (19.69)	200 (7.87)	700 (33.06)	7.8 (17.20)

* Exception: Cross-road drainage of busy roads

SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).