


## Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-200  
Slotted Grating, Ductile-Iron, OvalGrip Design  
with SnapLock Fastening (Load Class E600)



## Dimensions

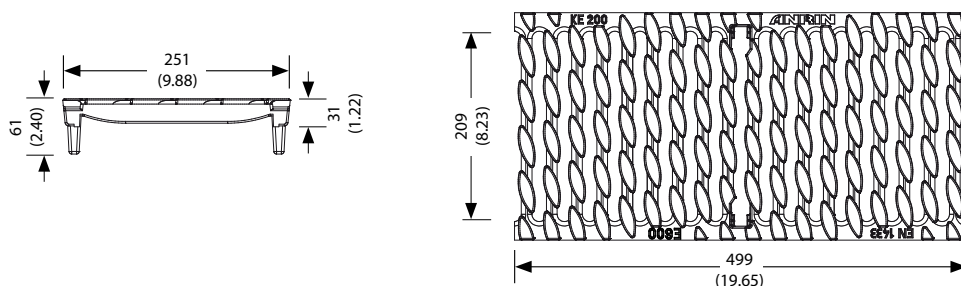

## Slotted Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm <sup>2</sup> /m (in <sup>2</sup> /ft)	Weight kg (lbs.)
Slotted grating with OvalGrip Design Ductile-Iron, SW=12mm (E600*)	01125120	500 (19.69)	250 (9.84)	990 (46.76)	11.9 (26.23)

\* Exception: Cross-road drainage of busy roads

## SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).