


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-200
Slotted Grating, Ductile-Iron, OvalGrip Design
with SnapLock Fastening (Load Class D400)



Dimensions

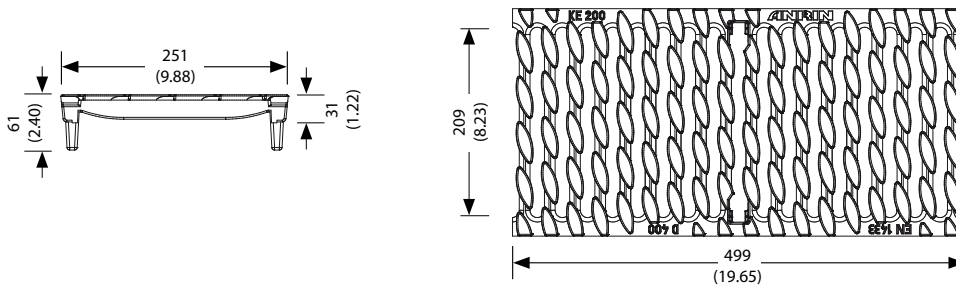

Slotted Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm ² /m (in ² /ft)	Weight kg (lbs.)
Slotted grating with OvalGrip Design Ductile-Iron, SW=12mm (D400*)	01125220	500 (19.69)	250 (9.84)	990 (46.76)	11.5 (25.35)

* Exception: Cross-road drainage of busy roads

SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).