


## Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-200  
Slotted Grating, HEELGUARD, ADA, Ductile-Iron  
with SnapLock Fastening (Load Class D400\*)



## Grating Dimensions

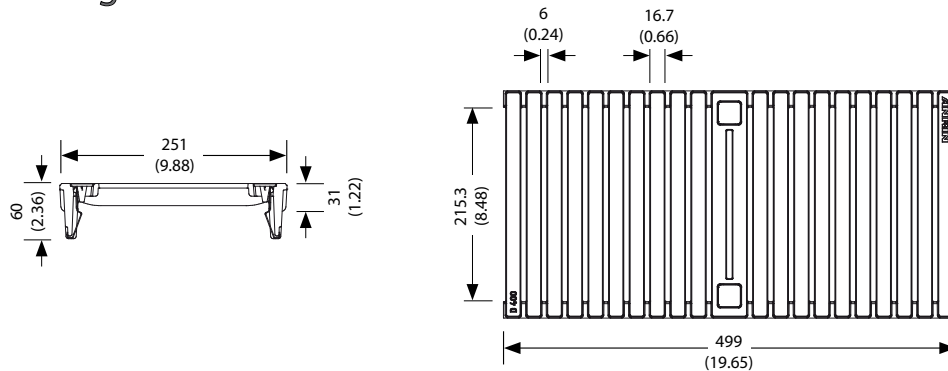

## Slotted Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm <sup>2</sup> /m (in <sup>2</sup> /ft)	Weight kg (lbs.)
Slotted grating, HEELGUARD Ductile-iron, SW 6 mm (D400*)	01125230	500 (19.69)	250 (9.84)	430 (20.31)	8.0 (17.64)

\* Exception: Cross-road drainage of busy roads

## SnapLock Fastening



The SnapLock fastening is used for gratings for channels  
with nominal widths of 150 mm (5.91 in) and 200 mm (7.87 in).