


Technical Data Sheet

ANRIN DRAIN Cover Gratings for KE-300 Slotted Grating, HEELGUARD, ADA, Ductile-Iron with SnapLock Fastening (Load Class D400*)



Grating Dimensions

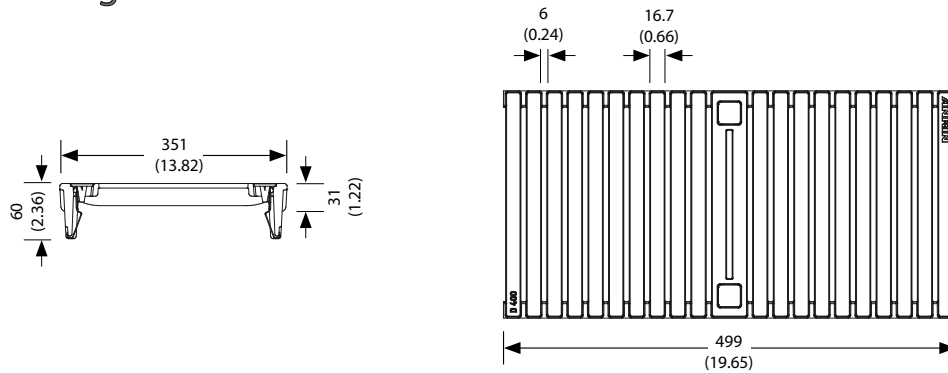

Slotted Grating Parts List

Designation	Article	Length mm (in)	Width mm (in)	Inlet Ø cm ² /m (in ² /ft)	Weight kg (lbs.)
Slotted grating, HEELGUARD Ductile-iron, SW 6 mm (D400*)	01135240	500 (19.69)	351 (13.82)	791 (37.37)	17.9 (39.46)

* Exception: Cross-road drainage of busy roads

SnapLock Fastening



The SnapLock fastening is used for gratings for channels with nominal widths of minimum 150 mm (5.91 in).



Every reasonable effort has been taken to ensure the accuracy of this document. However, we cannot accept responsibility for inaccuracies resulting from undetected errors or omissions.

Toll Free: 877-385-5130
www.northstarindustries.ca